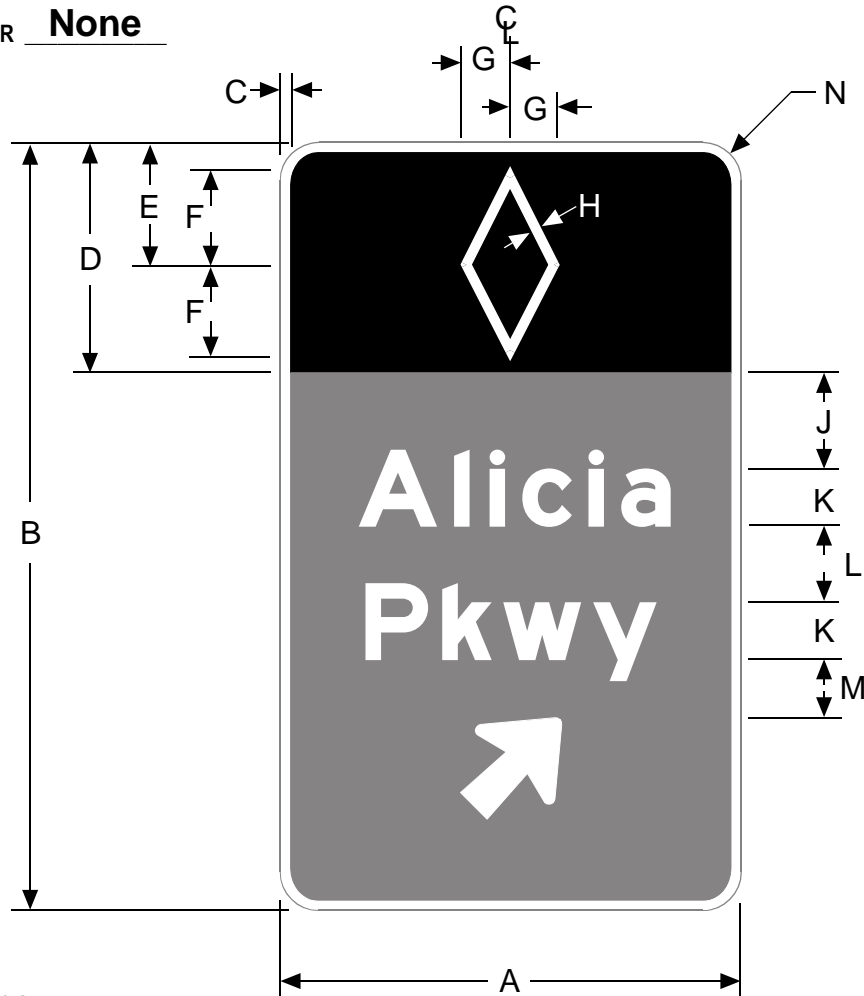


MUTCD NUMBER NoneCODE G85-7

Notes:

1. Series C or D alphabets, abbreviations and hyphenations may be used to maintain minimum sign widths. Smaller letter heights, 4" (100 mm) minimum, may be used as a last option.
2. For arrow size and dimensions, see Standard Arrows for Directional Signs in Chapter 5, Appendix 1.

SIGN SIZE (Inches)	DIMENSIONS (Inches)												
	A	B	C	D	E	F	G	H	J	K	L	M	N
Variable x 60	Var.	60	1	18	9-1/2	7-1/2	3-3/4	1-1/8	7-1/2	6UC&4-1/2LC	6	4-1/2	3
Variable x 72	Var.	72	1-1/4	18	9-5/8	7-1/2	3-3/4	1-1/8	10	8UC&6LC	8	6	6

SIGN SIZE (mm)	DIMENSIONS (Millimeters)												
	A	B	C	D	E	F	G	H	J	K	L	M	N
Variable x 1524	Var.	1524	25	457	241	191	95	29	191	150UC&113LC	152	114	76
Variable x 1829	Var.	1829	32	457	244	191	95	29	254	200UC&150LC	203	152	152

COLORS

BORDER, LEGEND & DIAMOND - WHITE (REFLECTIVE)

DIAMOND BACKGROUND - BLACK (NON-REFLECTIVE)

BACKGROUND - GREEN (REFLECTIVE)

- THE POLICY FOR INTENDED USAGE OF THIS SIGN IS SHOWN ON REVERSE SIDE -

POLICY: G85-7

The HOV Lane ACTION sign (G85-7) shall be used for exiting traffic for buffered and barriered HOV facilities and is generally located near the beginning of the egress locations. The sign repeats the destination shown on the Primary Directional sign (G86-8 or G86-9) and is generally located downstream from it.